

SLATEFIBER

165 SF3

Technical Sheet


6.5" speaker



SPECIFICATIONS

Nominal power	80W RMS
Maximum power	160W
Sensitivity	91dB
Nom. impedance	4Ω
Cone	Slatefiber
Surround	Butyl
DC resistance	2.8Ω
VC diameter	25mm 1"
Former	Kapton
Layers	2
Wire	Copper
Net weight	980g 2.16lbs
Frequency response (kit)	55-21kHz
Frequency response (woofer with crossover)	55-450Hz
Frequency response (woofer without crossover)	55-4kHz

FREQUENCY RESPONSE/IMPEDANCE

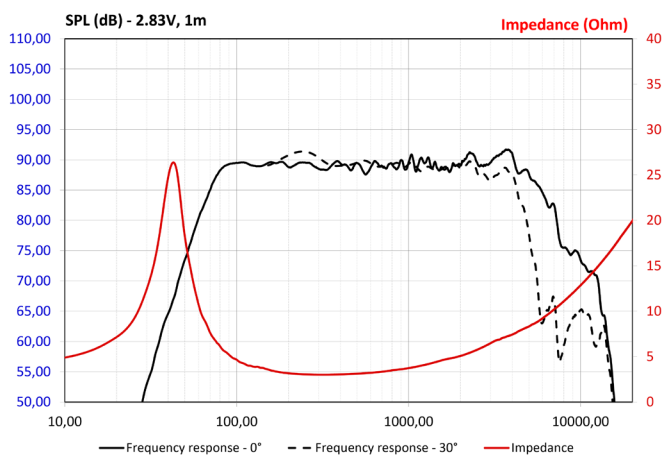

PARAMETERS

Rdc	2.75Ω
Fs	50Hz
Mms	15g
Cms	0.5mm/N
Vas	12l
Qts	0.55
Qes	0.7
Qms	9
Bxl	4.7N/A
Sd	132cm ²
SPL	91dB
Xmax	4mm

MECHANICAL DRAWING (MM)

