


PERFORMANCE PC 710

7x10" Performance Coaxial Kit




- Polyglass cone
- 90mm magnet
- Adjustable inverted dome tweeter

FREQUENCY RESPONSE/IMPEDANCE

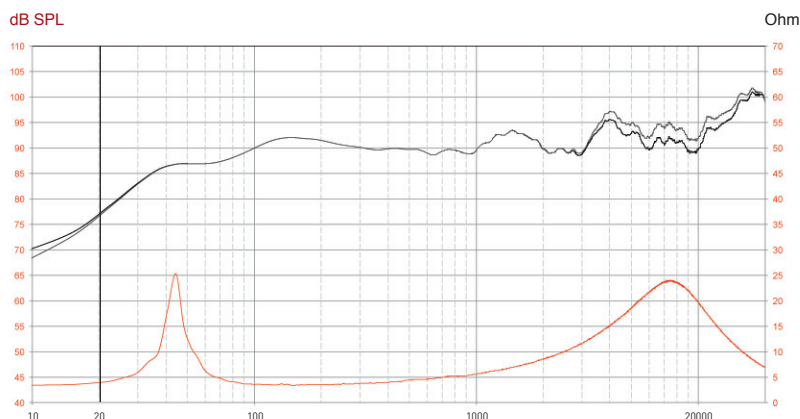

MECHANICAL DRAWING

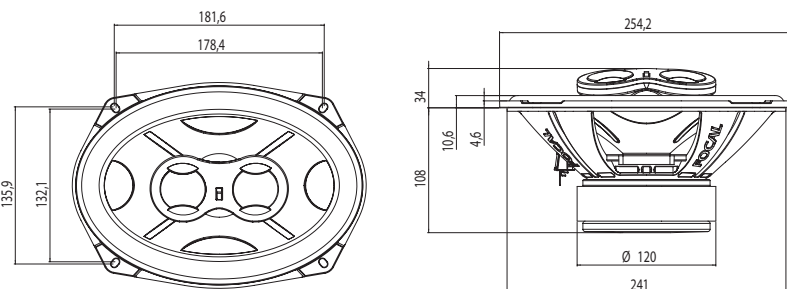

SPECIFICATIONS

Nominal power	100W RMS	
Maximum power	200W RMS	
Sensitivity (2,83V/1m)	92dB	
Cone	Polyglass	
Surround	Butyl	
Nom. impedance	4 Ohms	
DC resistance	2.8 Ohms	
VC diameter	40mm	1 9/16"
VC height	20mm	0 13/16"
Former	Kapton	
Layers	2	
Wire	Alu CCAW	
Inductance	0.16mH	
Xmax	± 7mm	0 1/4"
Magnet d x h	120mm x 30mm	4 3/4" x 1 3/16"
Magnet weight	2300g	5.07 lbs
Flux density		
Gap height	6mm	0 1/4"
Net weight	3150g	6.94 lbs

PARAMETERS

Fs	44Hz
Vas	36.1 l
Qts	0.77
Qes	0.84
Qms	9.13
Re	2.9 Ohms
Sd	250cm ²
Cas	2.57E-07m ⁵ /N
Mas	51.1kg/m ⁴
Ras	1544.3 Ohms.ac
Cms	400µm/N
Mms	33g
Rms	1kg/s
Ces	1050mF
Les	12.5mH
Res	31.5 Ohms
BI	5.6N/A
SPL	87.5 dB/W/m