

SLATEFIBER SUB 20 SF

Technical Sheet


8" subwoofer



SPECIFICATIONS

Nominal power	200W RMS
Maximum power	400W
Sensitivity	87dB
Nom. impedance	4Ω
Cone	Slatefiber
Surround	Butyl
DC resistance	2.8Ω
VC diameter	52mm 2.05"
Former	Glass fiber
Layers	4
Wire	Copper
Net weight	3300g 7.28lbs


FREQUENCY RESPONSE/IMPEDANCE

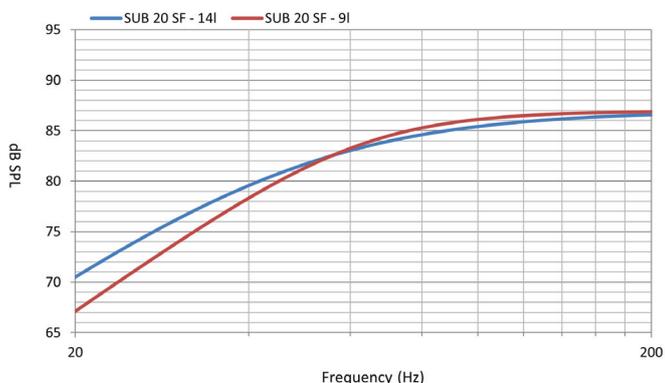

PARAMETERS

Rdc	2.8Ω
Fs	36Hz
Mms	95g
Cms	0.2mm/N
Vas	12l
Qts	0.39
Qes	0.42
Qms	3.8
Bxl	11.8N/A
Sd	202cm ²
SPL	87dB
Xmax	10mm

MECHANICAL DRAWING (MM)

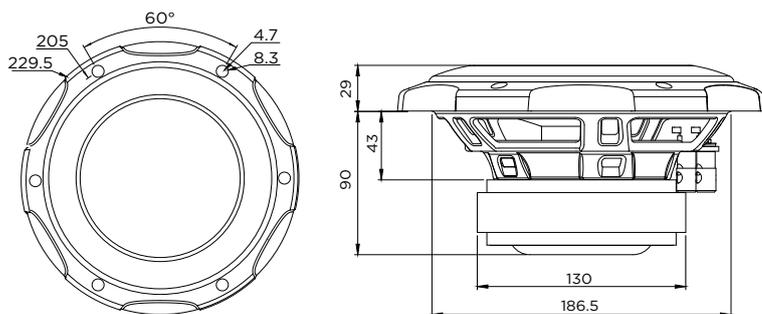

SUGGESTED APPLICATIONS

Volume	F-3dB
9L (0.32 cu.ft.)	68Hz
14L (0.5 cu.ft.)	64Hz