

SLATEFIBER 65 SF

Technical Sheet


2.5" speaker



SPECIFICATIONS

Nominal power	40W RMS
Maximum power	80W
Sensitivity	87dB
Nom. impedance	4Ω
Cone	Slatefiber
Surround	Butyl
DC resistance	2.8Ω
VC diameter	25mm 1"
Former	Kapton
Layers	2
Wire	Copper
Net weight	150g 0.33lbs
Frequency response	250-11kHz

FREQUENCY RESPONSE/IMPEDANCE

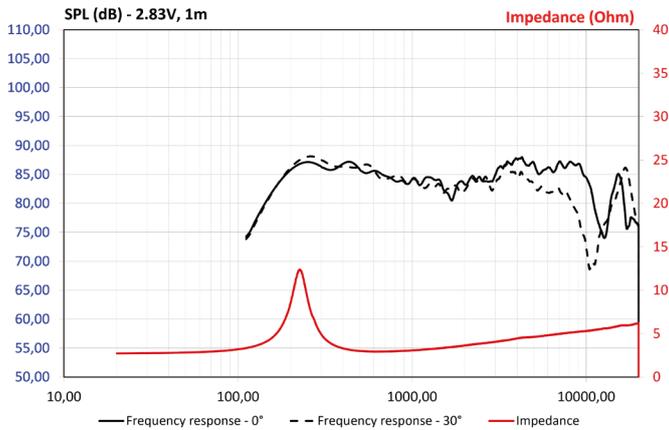

PARAMETERS

Rdc	2.8Ω
Fs	230Hz
Mms	2.8g
Cms	0.2mm/N
Vas	0.12l
Qts	1
Qes	1.3
Qms	4.5
Bxl	2.9N/A
Sd	22cm ²
SPL	87dB
Xmax	2mm

MECHANICAL DRAWING (MM)

