

# SLATEFIBER

## 165 SF3

Technical Sheet


### 6.5" speaker



### SPECIFICATIONS

Nominal power	80W RMS
Maximum power	160W
Sensitivity	91dB
Nom. impedance	4Ω
Cone	Slatefiber
Surround	Butyl
DC resistance	2.8Ω
VC diameter	25mm 1"
Former	Kapton
Layers	2
Wire	Copper
Net weight	980g 2.16lbs
Frequency response	55-21kHz

### FREQUENCY RESPONSE/IMPEDANCE

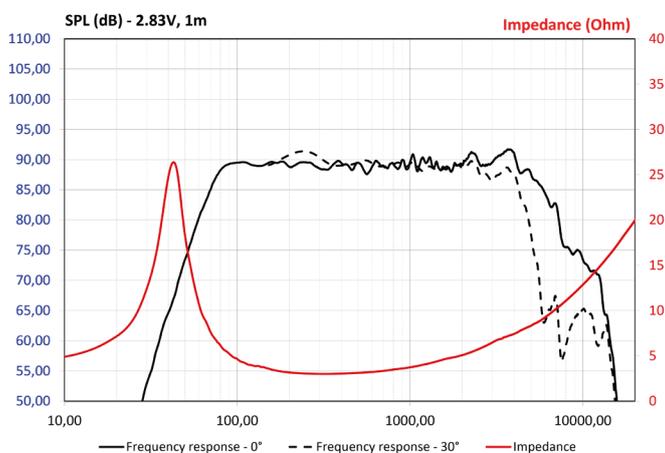

### PARAMETERS

Rdc	2.75Ω
Fs	50Hz
Mms	15g
Cms	0.5mm/N
Vas	12l
Qts	0.55
Qes	0.7
Qms	9
Bxl	4.7N/A
Sd	132cm <sup>2</sup>
SPL	91dB
Xmax	4mm

### MECHANICAL DRAWING (MM)

